





#### Features:

- DC 6.0 GHz
- 100 Watts
- BeO Ceramic
- Non-Nichrome Resistive Element
- Low VSWR
- 100% Tested

# Flanged Termination 100 Watts, 50Ω

#### **General Specifications**

Resistive Element Thick film

Substrate Beryllium oxide ceramic

Cover Alumina Ceramic

Mounting Flange Copper, Nickel plated per QQ-N-290

**Lead(s):** 99.9% pure silver (.006 thick)

## **Electrical Specifications**

**Resistance Range:** 50 ohms,  $\pm$  5% **Frequency Range;** DC - 6.0 GHz **Power:** 100 Watts


V.S.W.R.: 1.15:1 DC to 4 GHz 1.20:1 DC to 6 GHz

**Note:** Tolerance is  $\pm 0.010$ ", unless otherwise specified. Designed to meet of exceed applicable portions of MIL-E-5400. Operating temperature is -55 $^{\circ}$ C to 150 $^{\circ}$ C (see chart for derating temperatures).

All dimensions in inches.

Specifications subject to change with out notice.

**Outline Drawing** 

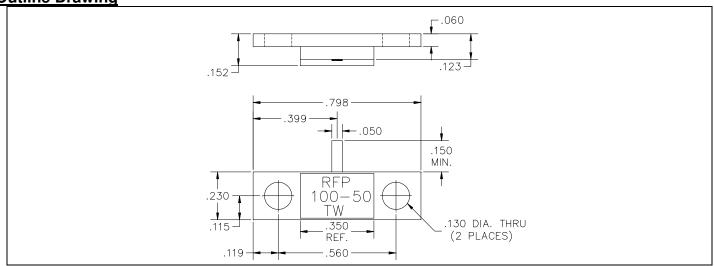

100-50TW (097) Rev A







Available on Tape and Reel For Pick and Place Manufacturing. USA/Canada: (315) 432-8909 Toll Free: (800) 544-2414 Europe: +44 2392-232392






**Typical Performance:** 

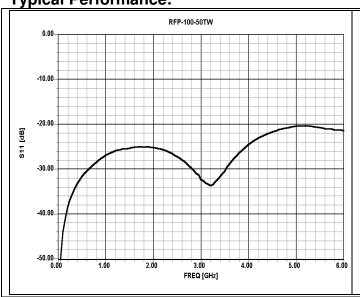


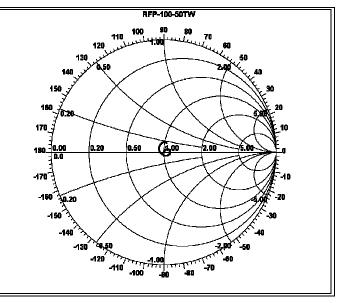

## **Power De-rating:**

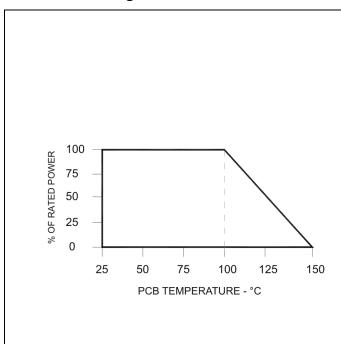

# **Mounting Footprint and Procedure:**

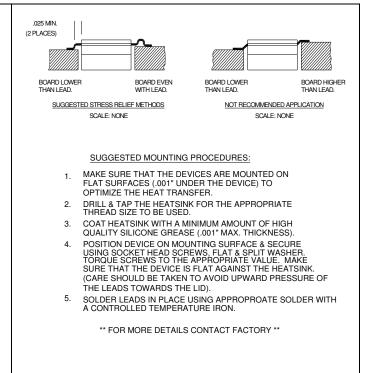

100-50TW (097) Rev A

USA/Canada: Toll Free: Europe: (315) 432-8909 (800) 544-2414 +44 2392-232392

Available on Tape and Reel For Pick and Place Manufacturing.

