



DIMENSIONS

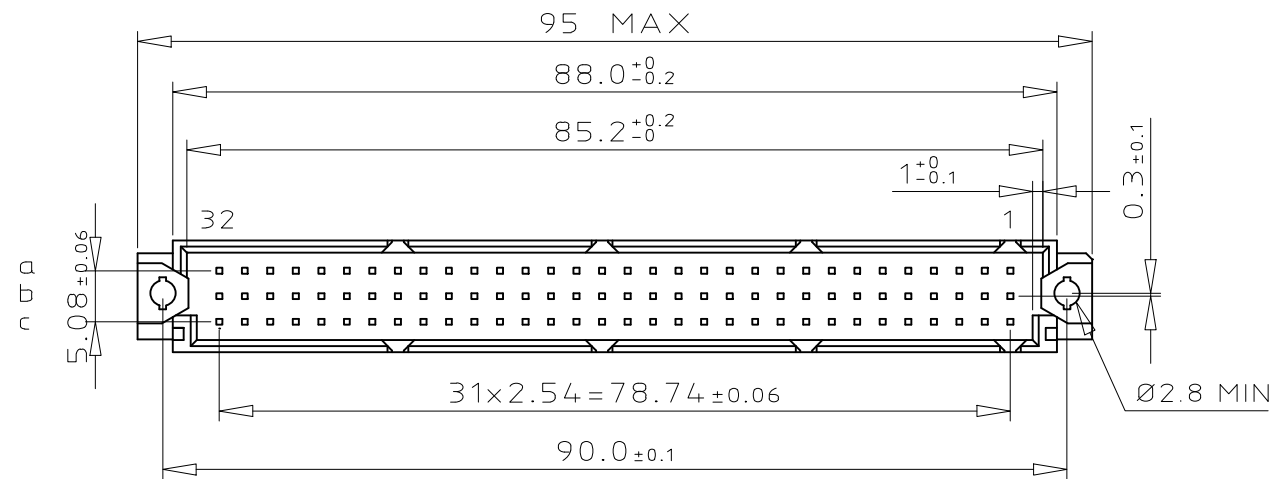


TERMINATION

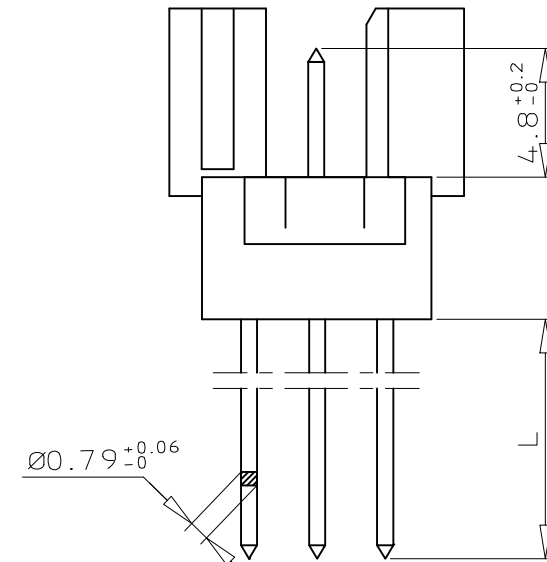

P/N PRINTING


DATE CODE PRINTING
YY-YEAR, XX-WEEK

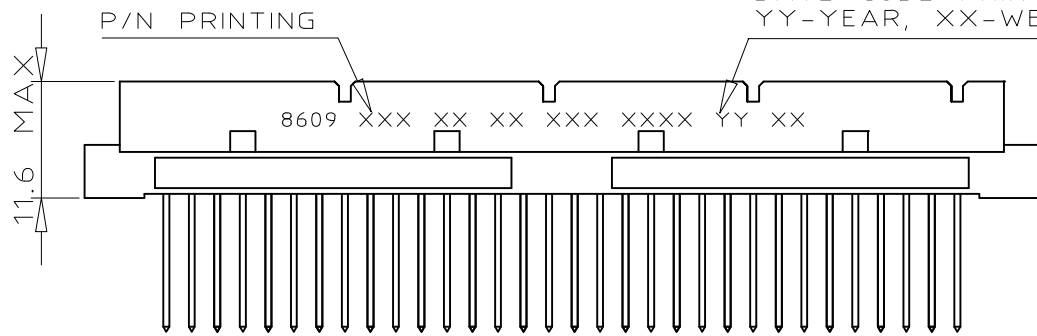

ORDERING INFORMATION

SERIES	8609	3	96	7	8	15	7	4	5	ELF
ROWS FITTED WITH CONTACTS										
ROW a	-	-	-	-	-	-	-	-	1	32
ROW a	b	c	-	-	-	-	-	-	3	96
ROW a	-	c	-	-	-	-	-	-	4	64
ROW a	-	-	c	-	-	-	-	-	4	32
NO. OF CONTACTS										
TYPE OF INSULATOR										
3 ROW MALE INSULATOR ----- 7										
METHOD OF MOUNTING										
REVERSE MOUNTING - STYLE R ----- 8										
TERMINATION STYLE										
WIRE WRAP L=13.1 ± 0.5 ----- 15										
WIRE WRAP L=18.2 ± 0.5 ----- 25										
OPTIONS										
NO OPTION ----- 7										
PERFORMANCE CLASS										
DIN 41612 CLASS 3 ----- 4										
DIN 41612 CLASS 2 ----- 5										
DIN 41612 CLASS 1 ----- 6										
AS PER MIL C 55302 / JSS 50808 ----- 8										
PITCH PER ROW										
2.54 mm ----- 5										
5.08 mm ----- 8										
LEAD FREE VERSION ----- ELF										

PCB LAYOUT

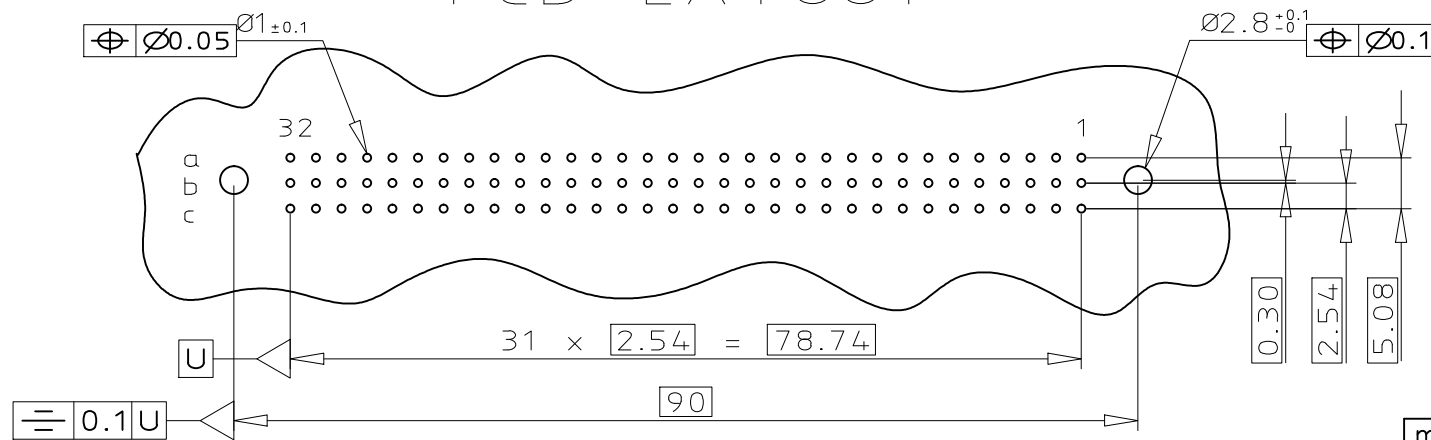

GENERAL CHARACTERISTICS & RoHS INFO

REFER DRAWING C-8609-0000A

mat'l. code	SEE DWG C-8609-0000A	surface	ISO 1302 ✓	tolerance	ISO 406 ISO 1101	projection	product family	8609
ltr	ecn no	dr	date	tolerances unless otherwise specified	angles	linear	title	DIN REVERSE HEADER
A	104-0063	MINI	2004-09-17	0.X ± 0.1				
B	105-0089	MINI	2005-05-19	0.XX ± 0.1				
C	105-0174	MINI	2005-09-27	0° ± 2°				
D	106-0061	MINI	2006-05-31	dr	MINI K V	2004-09-17	dwg no	sheet 1 of 1
E	108-0146	KR	2008-10-21	enrg	RAKHEE G	2004-09-17	size	A3
F	109-0200	KR	2009-09-22	chr	S ALOSIOUS	2010-12-04	type	Product Customer Drawing
G	110-0234	SAL	2010-12-04	appd	S ALOSIOUS	2010-12-04		
sheet index	revision sheet	G	1					